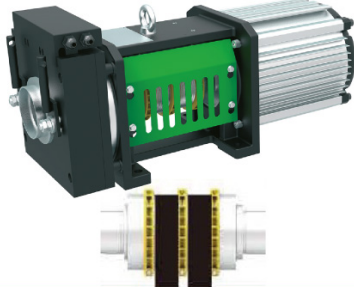
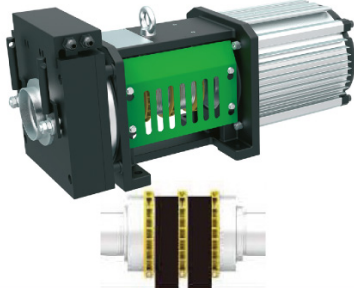
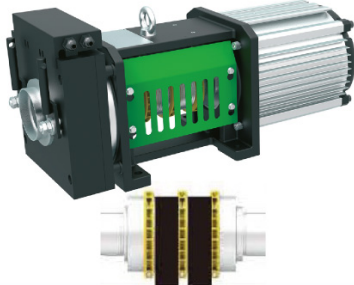


GDX-112

GDX112-400		Description	PM gearless traction machine (for GUDA belt)		
		Load	320-400 kgs	Sheave Diam:	86 mm
		Suspension	2:1	Traction Belt:	2 pieces
		Center Height	112 mm	Ins Class:	F
		Product Weight	87 kgs	Ip Code:	IP42
		Max.static Load	2000 kgs	Cooling Type:	natural
		Rated Power	1.1/1.7/2.7kw	Bearing:	SKF/NSK
		Rated Frequency	14.8/23.3/37 hz	Encoder:	ERNI387
		Rated Speed	178/280/444 r/min		
		Certificate	CE,EN81	remarks	
GDX112-480		Description	PM gearless traction machine (for GUDA belt)		
		Load	480 kgs	Sheave Diam:	86 mm
		Suspension	2:1	Traction Belt:	2 pieces
		Center Height	112 mm	Ins Class:	F
		Product Weight	87 kgs	Ip Code:	IP42
		Max.static Load	2000 kgs	Cooling Type:	natural
		Rated Power	1.27/2.0/3.2kw	Bearing:	SKF/NSK
		Rated Frequency	14.8/23.3/37 hz	Encoder:	ERNI387
		Rated Speed	178/280/444 r/min		
		Certificate	CE,EN81	Remarks	
GDX112-630		Description	PM gearless traction machine (for GUDA belt)		
		Load	630 kgs	Sheave Diam:	86 mm
		Suspension	2:1	Traction Belt:	2 pieces
		Center Height	112 mm	Ins Class:	F
		Product Weight	100 kgs	Ip Code:	IP42
		Max.static Load	2000 kgs	Cooling Type:	natural
		Rated Power	1.7/2.7/4.2kw	Bearing:	SKF/NSK
		Rated Frequency	14.8/23.3/37 hz	Encoder:	ERNI387
		Rated Speed	178/280/444 r/min		
		Certificate	CE,EN81	Remarks	